




THE ULTIMATE X-RAY SOLUTION

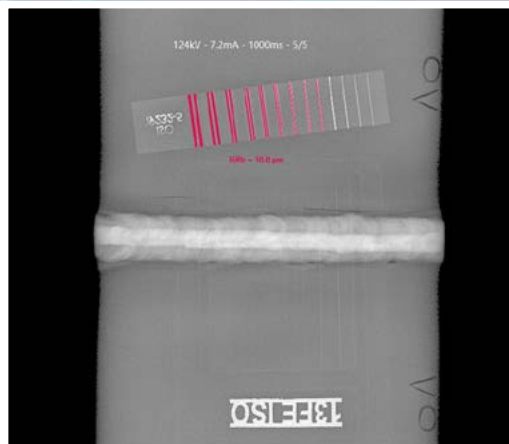

PORTABLE X-RAY SYSTEMS

Digital Radiography Solutions for NDT Applications

BUILD YOUR OWN BUNDLE



+



+



TELEDYNE ICM
Everywhere you look™

Part of the Teledyne Imaging Group

X-RAY SYSTEMS

X-RAY GENERATOR, DETECTOR, AND SOFTWARE IN ONE BUNDLE!

Discover our complete range of portable X-Ray systems for NDT inspections.


Fully developed in-house, these packages combine a detector, an X-Ray generator, and Sherlock NDT, a state-of-the-art and user-friendly NDT inspection software.

Paired with Teledyne ICM's X-Ray generators (**CP Series** or **CP Batteries**), the **GO-SCAN**'s detectors deliver a sharp, clear, and detailed image and can reveal a very large majority of defects such as cracks, corrosion and failing welds.

Sherlock NDT, Teledyne ICM's NDT inspection software is fully compatible with Teledyne ICM's complete range of portable X-Ray generators. It is the perfect tool for industrial radiography, allowing compliancy with most quality standards. The intuitive and user friendly touchscreen software produces high quality images, allows real-time (video) acquisition, and comes with many different enhancement features.

Make your own selection according to your inspection needs.

CONNECTIVITY

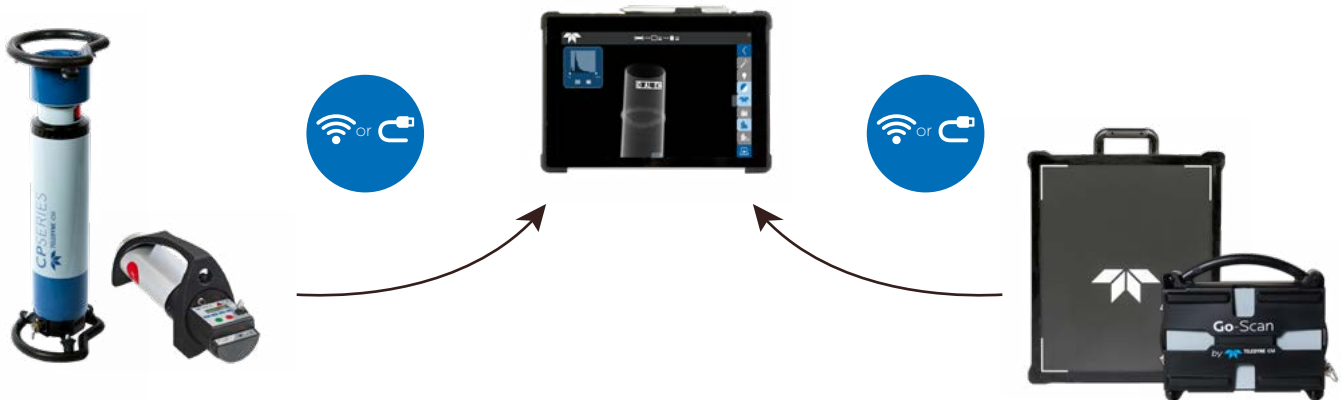



LIGHT-WEIGHT



100% DUTY CYCLE

CONSTANT
POTENTIALWIDE INPUT
POWER RANGE

RUGGEDIZED


CP BATTERY

	Unit	CP120B	CP160B	CP200B
Radiation geometry	-	Directional	Directional	Directional
Power supply	-	Battery	Battery	Dewalt Battery 54V
Output voltage range	kV	40 to 120	40 to 160	45 to 200
Tube current range	mA	0.1 to 1.0	0.1 to 0.5	0.2 to 1.5
Tube current at full output	mA	1.0	0.5	1.5
Maximum power at the anode	W	120	80	300
Constant power mode	-	Yes	Yes	Yes
Working cycle at 30°C (*)	%	/	/	100
Steel penetration (**)	mm/in	10 / 0.4	21 / 0.8	33 / 1.3 (***)
Weight (without hand/guard rings)	Kg/lbs	7.0 / 15.4	9.2 / 20.3	12.5 / 27.5
Overall dimensions	mm/in	Ø 124 x 476 / 4.9 x 18.7	Ø 124 x 520 / 4.9 x 20.5	672 x 267 x 337 / 26.4 x 10.5 x 13.3
Leakage dose at 1 m at full output	mSv/h	< 2.0	< 2.0	< 2.0
Optical focal spot according to EN 12543	mm/in	0.8 x 0.5 / 0.03 x 0.02	0.8 x 0.7 / 0.03 x 0.03	0.8 / 0.03
Maximum useful angle	°	50 x 50	60 x 60	40 x 60
Inherent filtration	mm/in	Equiv. 3.5 / 0.1 (Al)	Equiv. 3.5 / 0.1 (Al)	0.8 / 0.03 (Cu) Equiv. 3.5 / 0.1 (Al)
Waterproof level	-	IP54	IP54	IP65 (battery excluded)
Operating temperature	°C/°F°	-25 to +50 / -13 to +140	-25 to +50 / -13 to +140	-30 to +60 / -22 to +140
Storage temperature	°C/°F°	-40 to +80 / -40 to +176	-40 to +80 / -40 to +176	-40 to +80 / -40 to +176
Guard rings	-	/	/	2

(*) Open air

(**) 700 mm FFD, 10 min, AA400, D=2 for CPD

(***) 700mm FFD, 10 min, D700 film, density 2

CP SERIES BUILD-IN CAROUSEL
5 OUTPUT POSITIONS


Lead shutter




3 mm Aluminum filter



Customizable diaphragm



Laser pointer



0.8 mm Beryllium window

CP SERIES

	Unit	SITEX CP160D	SITEX CP200D	SITEX CP200DS	SITEX CP225D	SITEX CP300DM	SITEX CP300DS
Radiation geometry	-	Directional	Directional	Directional	Directional	Directional	Directional
Power supply	-	Mains	Mains	Mains	Mains	Mains	Mains
Output voltage range	kV	10 to 160	10 to 200	10 to 200	10 to 225	30 to 300	30 to 300
Tube current range	mA	1 to 10	1 to 10	0.5 to 10	1 to 10	0.5 to 10	0.5 to 6
Tube current at full output	mA	5.6	4.5	3.7	4.0	3	3
Maximum power at the anode	W	900	900	750	900	900	900
Constant power mode	-	Yes	Yes	Yes	Yes	Yes	Yes
Working cycle at 30°C (*)	%	100	100	100	100	100	100
Steel penetration (**)	mm/in	29 / 1.14	42 / 1.65	40 / 1.57	47 / 1.9	66 / 2.6	66 / 2.6
Weight	Kg/lbs	14.7 / 30.86	14.7 / 30.86	15.9 / 35.05	14.7 / 30.86	29 / 63.93	29 / 63.93
Overall dimensions	mm/in	Ø 140 x 725 / 5.5 x 28.5	Ø 140 x 725 / 5.5 x 28.5	Ø 140 x 705 / 5.51 x 27.75	Ø 140 x 725 / 5.5 x 28.5	Ø 180 x 837 / 7.1 x 33	Ø 180 x 837 / 7.1 x 33
Leakage dose at 1 m at full output	mSv/h	< 2.0	< 2.0	< 2.0	< 2.0	< 5.0	< 5.0
Optical focal spot according to EN 12543	mm/in	3 / 0.12	3 / 0.12	1 / 0.04	3 / 0.12	3 / 0.12	1 / 0.04
Maximum useful angle	°	60 x 40 elliptical	60 x 40 elliptical	60 x 40 elliptical	60 x 40 elliptical	60 x 40 elliptical	60 x 30 elliptical
Inherent filtration	mm/in	0.8 / 0.03 (Be window)	0.8 / 0.03 (Be window)	0.8 / 0.03 (Be window)	0.8 / 0.03 (Be window)	0.8 / 0.03 (Be window)	0.8 / 0.03 (Be window)
Waterproof level	-	IP65	IP65	IP65	IP65	IP65	IP65
Operating temperature	°C/°F°	-30 to +60 / -22 to +140	-30 to +60 / -22 to +140	-30 to +60 / -22 to +140	-30 to +60 / -22 to +140	-30 to +60 / -22 to +140	-30 to +60 / -22 to +140
Storage temperature	°C/°F°	-40 to +70 / -40 to +158	-40 to +70 / -40 to +158	-40 to +70 / -40 to +158	-40 to +70 / -40 to +158	-40 to +70 / -40 to +158	-40 to +70 / -40 to +158
Guard rings	-	2	2	2	2	2	2

(*) Open air - airstream 5m/sec.


(**) 700 mm FFD, 10 min, AA400, D=2 for CPD



USER-FRIENDLY




ULTRA LIGHT



PLUG & PLAY



FAST SET-UP

FULLY
INTEGRATED

GO-SCAN

GO-SCAN	Unit	GO-SCAN 1506	GO-SCAN 1510		GO-SCAN 2329	GO-SCAN 3025	GO-SCAN 3643	GO-SCAN 4335	GO-SCAN BENDABLE		
			HR	XR					1025B	1043B	
GENERAL											
Technology	-	CMOS Active Pixel	CMOS Active Pixel		aSi	aSi	aSi	aSi	aSi		
Pixel pitch	µm	49.5	99	49.5	75	120	99	154	99		
Sensitivity settings	#	1	2	1	-	1	-	1	-		
Active area	mm/in	57 x 146 / 2.2 x 5.7	102 x 153 / 4 x 6	114 x 145 / 4.5 x 5.7	230 x 288 / 9 x 11.3	300 x 250 / 11.8 x 9.8	351 x 427 / 13.8 x 16.8	434 x 355 / 16.9 x 13.8	97 x 249 / 3.8 x 9.8	97 x 427 / 3.8 x 16.8	
Active resolution	pxl	1152 x 2940	1032 x 1548	2304 x 2940	3072 x 3840	2560x 2048	3548 x 4316	2816 x 2304	988 x 2524	988 x 4316	
BANDWIDTH											
Data interface	-	GigE & Wi-Fi**	GigE & Wi-Fi		GigE & Wi-Fi	GigE & Wi-Fi	GigE & Wi-Fi	GigE & Wi-Fi	GigE & Wi-Fi		
ADC conversion	bits	14	14		16	16	16	16	16		
Frame rate – 1x1 (GigE)	fps	15	up to 30	up to 9	-	0.3	-	0.3	-		
POWER CONSUMPTION											
Power supply	-	Battery** / Mains*	Battery / Mains*		Battery / Mains*	Battery / Mains*	Battery / Mains*	Battery / Mains*	Battery / Mains*		
Power consumption	W	40	15		< 24	17	< 24	20	< 24		
Battery performance	-	-	Approx. 7 hours		9h (standby) / 7h (acquisition)	Approx. 7 hours	12h (acquisition) / 16h (standby)	Approx. 7 hours	6h (standby) / 5.5h (acquisition)		
INTEGRATION											
Dimension (without sleeve)	mm/in	206 x 78 x 31 / 8.1 x 3 x 1.2	238 x 154 x 25 / 9.4 x 6.0 x 1.0		355 x 322 x 17 / 13.9 x 12.7 x 0.7	339 x 287 x 18.8 / 13.3x 11.3 x 7.4	384 x 460 x 15 / 15.1 x 18.1 x 0.6	464 x 388 x 18.8 / 18.3 x 15.3 x 7.4	182 x 443 x 20 / 7.2 x 17.4 x 0.8	182 x 620.5 x 20 / 7.2 x 24.4 x 0.8	
Overall dimension	mm/in	218 x 90 x 35 / 8.6 x 3.5 x 1.4	259 x 227.7 x 107.5 / 10.2 x 8.9 x 4.2		408.4 x 404.9 x 34 / 16 x 15.9 x 1.3	412.5 x 310 x 34.2 / 16.2 x 12.2 x 1.3	474 x 513 x 26 / 18.7 x 20.2 x 1	538.5 x 410 x 34.5 / 21.2 x 16.1 x 1.3	230 x 473 x 21 / 9 x 18.6 x 0.8	230 x 650.5 x 21 / 9 x 25.6 x 0.8	
Weight	Kg/lbs	1.04 / 2.29	3.5 / 7.7		5.3 / 11.7	3.5 / 6.6	5.7 / 12.5	5.9 / 13	1.5 / 3.3	1.7 / 3.7	
ENVIRONMENTAL											
Operating temperature	°C/°F	+10 to +40°C / +50 to +104°F	-20 to 50°C / -4 to +122°F		-20 to +50°C / -4 to +122°F	-20 to 50°C / -4 to +122°F	-20 to 50°C / -4 to 122°F	-20 to 50°C / -4 to 122°F	-20 to 50°C / -4 to +122°F		
Storage temperature	°C/°F	-10 to +55°C / +14 to +131°F	-20 to 60°C / -4 to +140°F		-20 to +50°C / -4 to +122°F	-20 to 60°C / -4 to +140°F	-20 to 50°C / -4 to 122°F	-20 to 60°C / -4 to 140°F	-20 to 50°C / -4 to +122°F		
Humidity	% R.H.	10 to 80	20 to 80		10 to 90	30 to 75	30 to 85	30 to 75	10 to 90		
X-ray energy range	kV	Up to 225	Up to 225		Up to 450	Up to 300	Up to 450	Up to 300	Up to 450		


(*) with Power/Com Cable accessory

(**) with Power unit

BENDABLE DETECTORS RANGE
FOR CIRCUMFERENTIAL WELDS

Minimum pipe diameter = 152 mm / 6" (Go-Scan 1025B)
= 304 mm / 12" (Go-Scan 1043B)



TOUCHSCREEN
SOFTWARE

PLUG AND PLAY

WIRELESS
OR CABLE

IMAGE EDITING



TELEDYNE FILTER

SOFTWARE FEATURES

All-in-one touchscreen software
Available in 20 languages
Add unlimited users
Library to store all inspections efficiently

Interconnected by cable or wireless
Fast image acquisition
Preset exposure configurations

MULTIPLE IMAGE EDITING FEATURES

Image editing
Real-time adjustable dynamic filter
Adjustable Teledyne filter
Automatic & manual histogram equalization
DICONDE Compliant
Emboss
Black & white
Pseudo-colours
Grey level input value
HDR
Smart measurement tool
SNR / SNRn
CNR / CNRn
SRb / iSRb / automatic IQI recognition
Wall thickness measurement
Annotation / Highlight

Mirroring / Rotation
Pixel map generation and edition
Real-time Image acquisition
Exposure time calculator
Stitching tool
Monitoring and modifying parameters during inspection
During the inspection, possibility to adapt parameters and apply filters
Superpower Zoom (up to 5000%)
Drag&drop external images from Windows into the image editor
Automatic file export
ROI filtering
Gamma sources support
"No detector" mode
Advanced reporting and data export tools (custom tags, tags edition, new data export features)
Extended detector range support




Stitching of multiple images



Wall thickness measurement



iSRb calculation and automatic IQI recognition

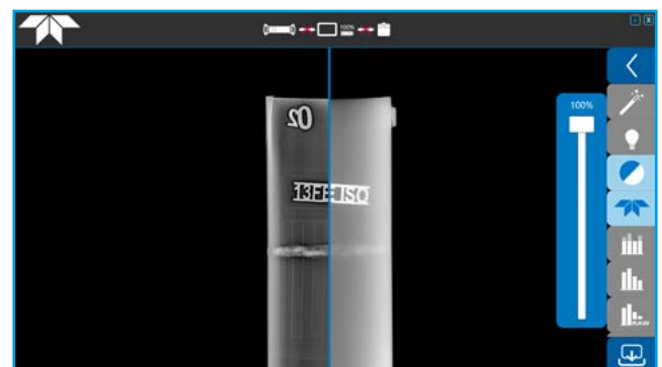

With Teledyne Filter

Without Teledyne Filter

PORTABLE X-RAY SYSTEMS

Digital Radiography Solutions for NDT Applications

05/2026

All specifications are non contractual and subject to change without prior notice.

SAFETY WARNINGS. The Goods can cause death, personal injury or property damage if they are used, operated, maintained, stored or disposed of improperly. In particular, the Goods may emit x-ray radiation, so adequate safety precautions must be taken to minimize exposure. At a minimum, Buyer should adhere to the ALARA (as low as reasonably achievable) principle and should comply with all applicable regulations relating to protection against x-ray emissions.

TELEDYNE ICM

Zoning Les Plennes / Rue du Progrès 3 / B-4821 Andrimont (Dison) - Belgium

+32 (0)87 44 01 50 / icm.sales@teledyne.com



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group